


B15

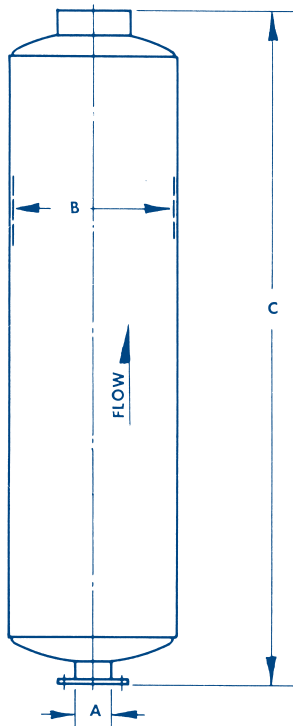

B34

B15 B34

Vent Silencers

Design

Model B15

Absorption type silencer employing a single or multi-stage stage diffuser and containing an acoustic core to decrease high frequency noise.

Model B34

A multi-chamber silencer employing a single stage diffuser and absorption section to effectively treat both high and low frequencies.

Construction

All welded construction of sheet and plate steel. Absorption material appropriate for operating conditions. Exterior surfaces are prime coated. Flanges are 150 lb. ANSI RF SO. Side connections, mounting brackets, flanged outlet nozzle, or special paint available at extra cost.

Octave Band Center Frequency (Hz)	63	125	250	500	1K	2K	4K	8K
Typical Attenuation (dB) Model B15	22	25	33	47	53	55	53	47
Typical Attenuation (dB) Model B34	26	33	36	38	40	38	33	26

Model	A	B	C	Wt.
B15-4	2	10	45	120
B15-5	2	12	53	150
B15-6	3	16	60	180
B15-8	4	18	67	268
B15-10	5	20	79 ¹ / ₂	477
B15-12	6	24	95 ³ / ₄	670
B15-14	6	26	104	936
B15-16	8	30	112	1344
B15-18	8	30	116 ¹ / ₂	1398
B15-20	10	36	129 ⁵ / ₈	2201
B15-22	10	36	144	2448
B15-24	12	42	154	2926
B15-26	12	42	168	3192
B15-28	14	48	179	3938
B15-30	14	48	193	4246
B15-36	18	60	216	7128
B15-42	22	66	255	10200
B15-48	24	72	288	12672
B15-54	26	78	316	14852
B15-60	30	84	336	17472

Model	A	B	C	Wt.
B34-4	2	12	60	90
B34-5	2 ¹ / ₂	14	67	145
B34-6	3	16	73	190
B34-8	4	18	80	230
B34-10	5	22	93	440
B34-12	6	26	112	575
B34-14	6	30	125	920
B34-16	8	30	135	965
B34-18	8	36	150	1380
B34-20	10	42	176	1930
B34-22	10	42	176	2115
B34-24	12	54	190	2770
B34-26	12	54	216	3590
B34-28	14	60	229	4325
B34-30	14	60	247	4600
B34-36	18	72	280	8050
B34-42	22	84	332	9625
B34-48	24	96	370	13775
B34-54	24	108	397	19150
B34-60	30	114	437	20400



Specialists in Industrial Silencing

Stoddard Silencers, Inc.
 1017 Progress Drive • Grayslake, Illinois 60030
 Telephone (847) 223-8636 • FAX (847) 223-8638
 E-Mail - info @ stoddardsilencersinc.com
 Web page - www.stoddardsilencersinc.com